


Gate Hose Valve Fig. 07-070

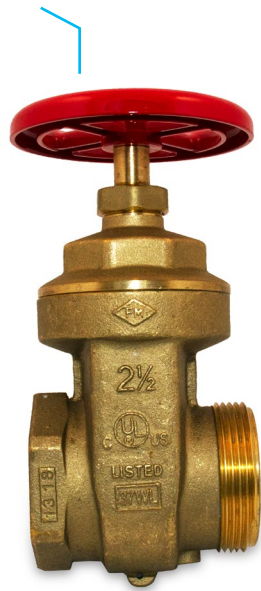

Specifications

Materials:

Forged Brass*

Finish:

Rough Brass

Sizes:

2 1/2" FNPT x MNH**

2 1/2" FNPT X FNH Swivel

3" FNPT x 2 1/2" MNH**

* Contains lead. Not for use in water systems intended for human consumption.

**For dry systems only

Description

Gate type hose valves feature all brass* construction with forged bodies for rigidity and light weight. Used as a fire department outlet connection. Unrestricted waterway allows full flow. Suitable for use as a pump test valve. Non-rising stem requires less installation space. 300 psi UL, ULC and FM Approved. 300 PSI, UL/ULC listed, FM approved.

Installation

Install in accordance with customary installation practices. Use an approved thread sealant such as PipeFit® Thread Sealing Paste with PTFE on the male threads to which the valve is being installed. Never use tape and dope. DO NOT OVER TIGHTEN. Over tightening of the valve during installation to the male pipe threads may crack or deform the valve body. Only use tools suitable for the installation of this product. Do not use pipe wrench extenders to increase leverage on pipe wrenches. This may result in valve damage as well as personal injury.



FPPI
An ASC Engineered Solution

PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	