

## Bullhead Tee Fig. 7062



 - Available galvanized

### Material Specifications

#### Fabricated Fittings

Carbon Steel, Schedule 40, conforming to ASTM A53, Grade B

#### Coatings

Rust inhibiting paint

Color: Orange (Standard)

Hot Dipped Zinc Galvanized conforming to ASTM A153 (Optional)

Other available options

(Example: RAL3000 or RAL9000 Series)


These fittings are designed to provide minimal pressure drop and uniform strength.

For Listings/Approval Details and Limitations, visit our website at [www.asc-es.com](http://www.asc-es.com) or contact an ASC Engineered Solutions™ Sales Representative.



PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	

## Bullhead Tee Fig. 7062

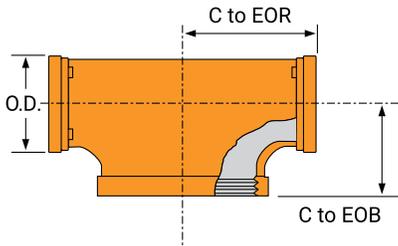

Nominal Size	O.D.	Max. Rated Pressure	Center to End of Run	Center to End of Branch	Approx. Wt. Ea.
In./DN(mm)	In./mm	PSI/bar	In./mm		Lbs./kg
5 x 5 x 8 125 x 125 x 200	5.563 141.3	300 20.7	7 <sup>3</sup> / <sub>4</sub> 197	5 <sup>1</sup> / <sub>2</sub> 140	31.0 14.1
6 x 6 x 8 150 x 150 x 200	6.625 168.3	300 20.7	7 <sup>3</sup> / <sub>4</sub> 197	6 <sup>1</sup> / <sub>2</sub> 165	37.6 17.1



asc-es.com

Building connections that last™