

Building connections that last™



Sharpe® Series 50

ASME Class 150, Flanged,
Full Port, Ball Valve
Datasheet

½" – 8"



ASME Class 150, Flanged, Full Port, Ball Valves

Sharpe® Series 50



Design Features

ASME B16.34 Design

Full port, split body design meets all the requirements of ASME B16.34 for Class 150 ball valves.

Blow-Out Proof Stem

The internal entry stem is machined with a heavy shoulder to prevent blowout.

Anti-Static Configuration

Anti-static devices are included at two points on the valve stem to provide continuous ball-to-stem and stem-to-body grounding, to prevent build-up of static charge in the valve.

Live-Loaded Stem Seals

Stem seals are live-loaded using Belleville washers to provide consistent sealing forces, reducing or eliminating the need for frequent seal adjustment.

Fully Encapsulated Body Seals

Provides consistent and controlled loading of the body seal compression through a full metal-to-metal contact joint design, eliminating seal extrusion and potential body joint leakage.

Integral Mounting Pad

Ideal for actuation, ISO 5211 mounting dimensions simplify fit and alignment between valve, bracketry, and actuator. Permits easy field conversion from manual operation to actuation.

Lockable Handle

Sharpe Series 50 ball valves are supplied with lever handles designed to permit locking the valve in either the open or closed position. Sizes through 2" are supplied with a latch engaged at open and closed positions to prevent inadvertent operation. Larger sizes have a lockable pipe handle.

Slotted Seat Design

Relief slots on the perimeter of the seats help equalize body pressure and assure leak-tight sealing.

Seats and Seals

Seat materials are offered in RTFE or TFM. Stem packing is RTFE and body seals are PTFE.

Floating Ball Design

Precision engineered and machined solid stainless steel ball with relief hole in the stem slot prevents build-up of cavity pressure while the valve is in the open position.


Material Traceability

Body and end piece casting are marked with the heat codes providing traceability to the chemical analysis and material test reports performed at the foundry. CMTR's (Certified Material Test Reports) are available upon request.

NACE

NACE MR-0175


ASME Class 150, Flanged,
Full Port, Ball Valves
Sharpe® Series 50

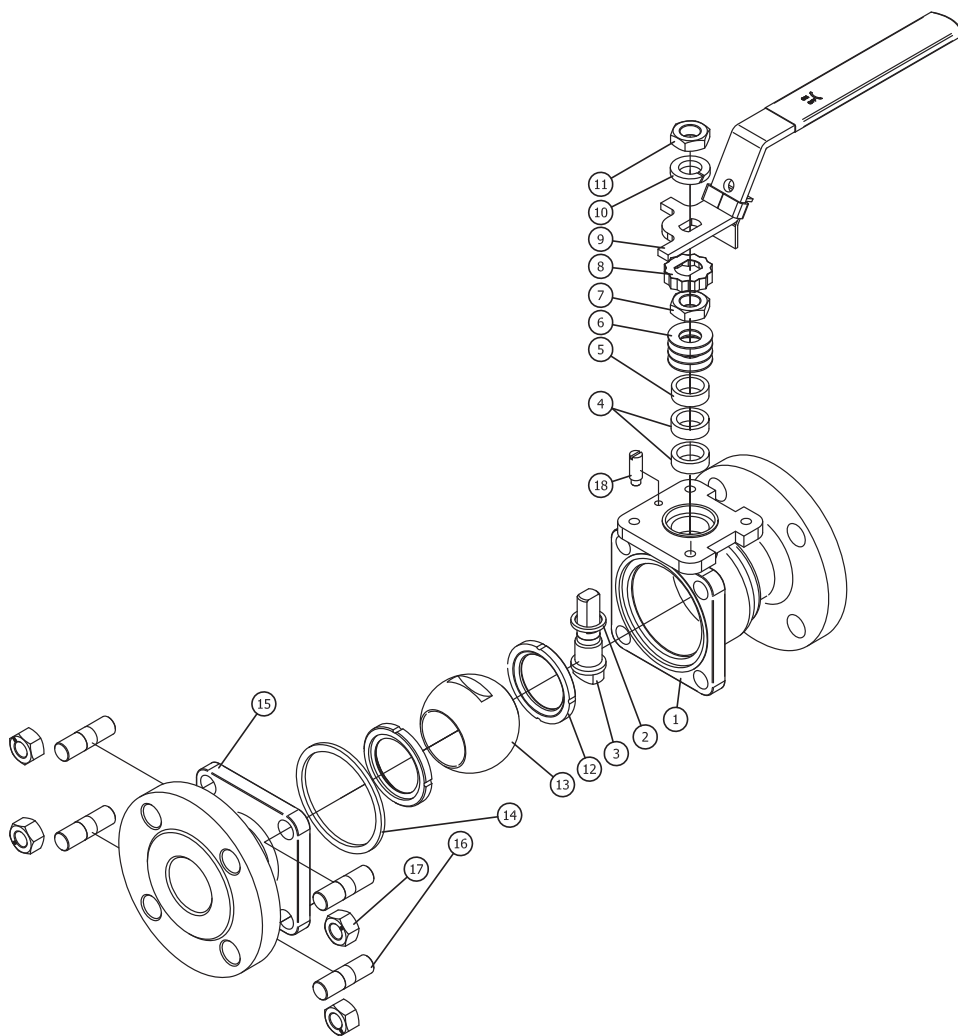

Parts & Materials ½" – 2" Class 150

No.	Part Name	Material	Qty.	No.	Part Name	Material	Qty.
1	Body	Carbon Steel ASTM A216 WCB 316 Stainless Steel ASTM A351 CF8M	1	9	Handle	300 Series Stainless Steel	1
2	Thrust Bearing	RTFE	1	10	Handle, Washer	300 Series Stainless Steel	1
3	Stem	316 Series Stainless Steel	1	11	Handle, Nut	300 Series Stainless Steel	1
3A	Anti-Static Device Ball Spring	(Located on Stem, Not Shown) 300 Series Stainless Steel Hard Drawn Stainless Steel	2	12	Seat	RTFE, TFM	2
4	Stem Packing	RTFE	2	13	Ball	316 Stainless Steel	1
5	Packing Gland	300 Series Stainless Steel	1	14	Body Seal	PTFE	1
6	Belleville Washer	300 Series Stainless Steel	4	15	End Cap	Carbon Steel ASTM A216 WCB 316 Stainless Steel ASTM A351 CF8M	1
7	Gland Nut	300 Series Stainless Steel	1	16	Body Stud	ASTM A193 Gr B8MA	Mfg. Std.
8	Lock Tab	300 Series Stainless Steel	1	17	Body Nut	ASTM A194 Gr 8A	Mfg. Std.
				18	Stop Pin	300 Series Stainless Steel	1

ASME Class 150, Flanged,
Full Port, Ball Valves
Sharpe® Series 50

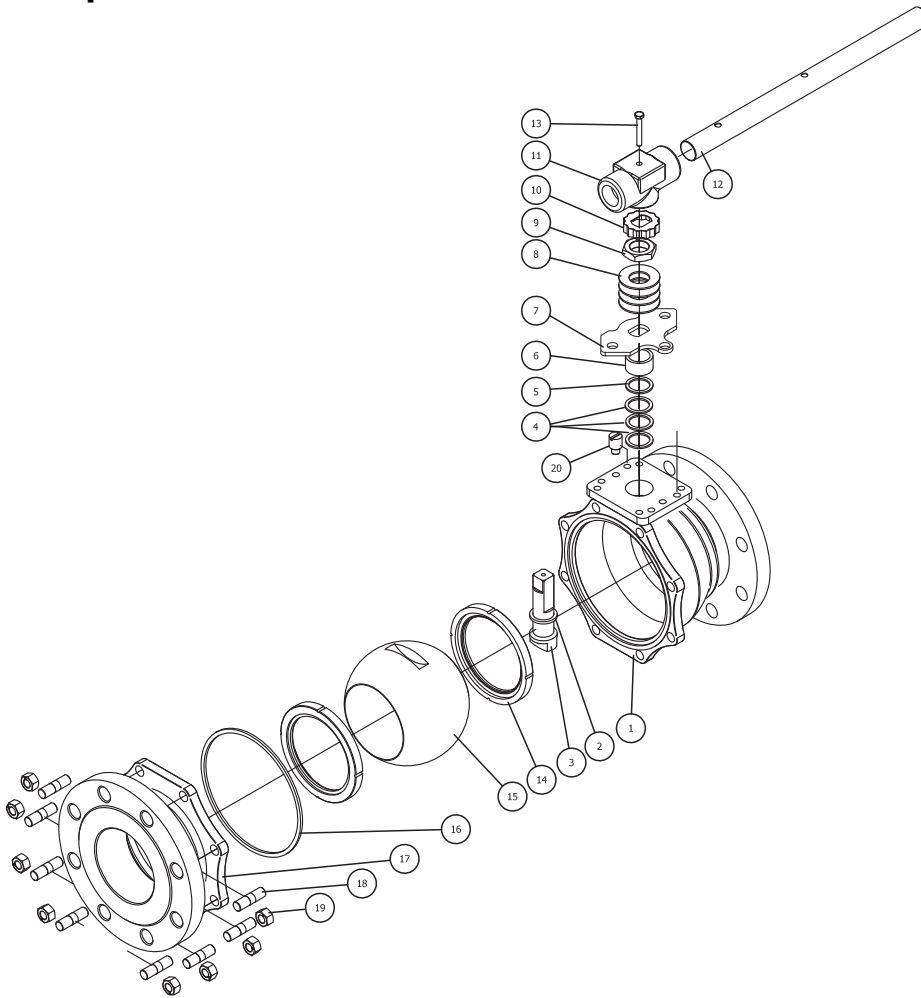


Parts & Materials 2½" – 4" Class 150

No.	Part Name	Material	Qty.
1	Body	Carbon Steel ASTM A216 WCB 316 Stainless Steel ASTM A351 CF8M	1
2	Thrust Bearing	RTFE	1
3	Stem	316 Stainless Steel	1
3A	Anti-Static Device Ball Spring	(Located on Stem, Not Shown) 300 Series Stainless Steel Hard Drawn Stainless Steel	2
4	Stem Packing	RTFE	3
5	Plain Washer	300 Series Stainless Steel	1
6	Packing Gland	300 Series Stainless Steel	1
7	Stop Plate	300 Series Stainless Steel	1
8	Belleville Washer	300 Series Stainless Steel	4
9	Gland Nut	300 Series Stainless Steel	1

No.	Part Name	Material	Qty.
10	Lock Tab	300 Series Stainless Steel	1
11	Wrench Block	300 Series Stainless Steel	1
12	Handle, Pipe	Galvanized Steel	1
13	Handle, Bolt	300 Series Stainless Steel	1
14	Seat	RTFE, TFM	2
15	Ball	316 Stainless Steel	1
16	Body Seal	PTFE	1
17	End Cap	Carbon Steel ASTM A216 WCB 316 Stainless Steel ASTM A351 CF8M	1
18	Body Stud	ASTM A193 Gr B8MA	Mfg. Std.
19	Body Nut	ASTM A194 Gr 8A	Mfg. Std.
20	Stop Pin	300 Series Stainless Steel	1

ASME Class 150, Flanged,
Full Port, Ball Valves
Sharpe® Series 50

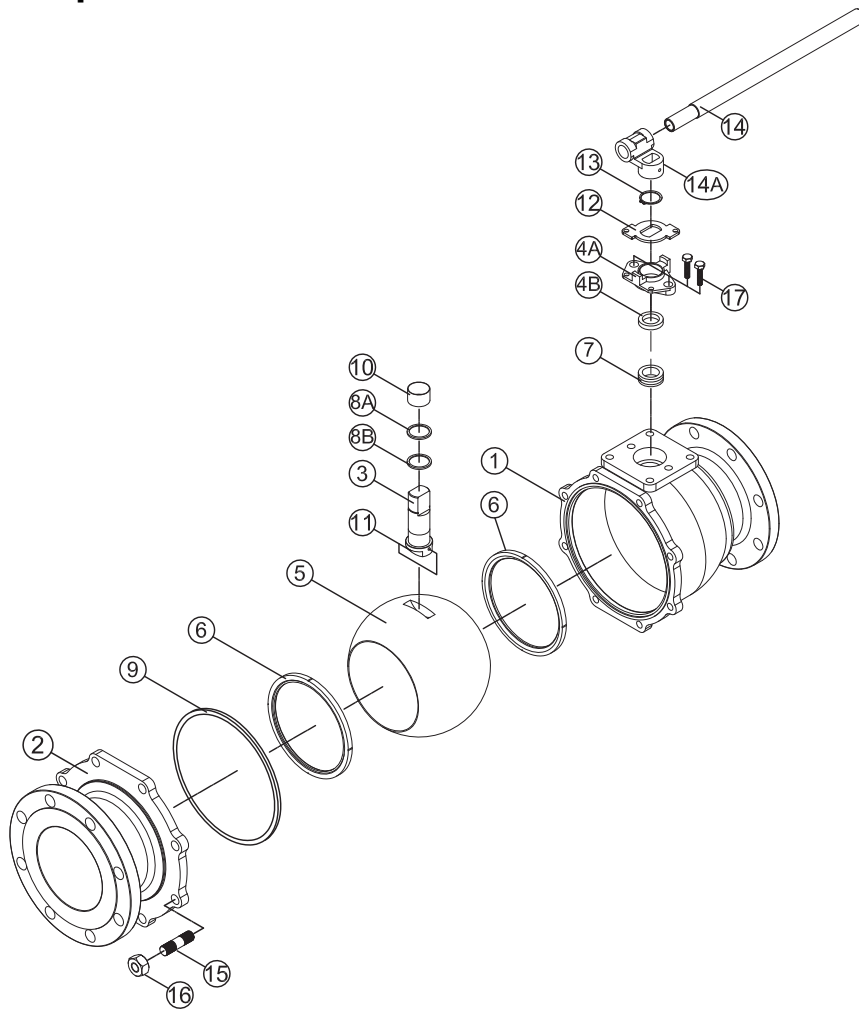

Parts & Materials 6" – 8" Class 150


No.	Part Name	Material	Qty.
1	Body	Carbon Steel ASTM A216 WCB 316 Stainless Steel ASTM A351 CF8M	1
2	End Cap	Carbon Steel ASTM A216 WCB 316 Stainless Steel ASTM A351 CF8M	1
3	Stem	316 Stainless Steel	1
4A	Gland	Carbon Steel ASTM A216 WCB 316 Stainless Steel ASTM A351 CF8M	1
4B	Sleeve	Steel 300 Series Stainless Steel	1
5	Ball	316 Stainless Steel	1
6	Seat	RTFE	2
7	Stem Packing	PTFE	4
8A	Thrust Bearing	PTFE	1
8B	Thrust Bearing	PTFE	1

No.	Part Name	Material	Qty.
9	Body Seal	PTFE	1
10	Stem Bearing	RTFE	1
11	Anti-Static Device Ball Spring	(Located on Stem, Not Shown) 300 Series Stainless Steel Hard Drawn Stainless Steel	2
12	Travel Stop	Zinc Plated Steel 300 Series Stainless Steel	1
13	Snap Ring	Nickel Plated Carbon Steel	1
14	Handle, Pipe	Ductile Iron	1
14a	Wrench Block	Carbon Steel ASTM A216 WCB	1
15	Stud	ASTM A193 Gr B7M ASTM A193 Gr B8A	Mfg. Std.
16	Nut	ASTM A194 Gr 2HM ASTM A194 Gr 8MA	Mfg. Std.
17	Gland Bolt	Steel 300 Series Stainless Steel	2

ASME Class 150, Flanged, Full Port, Ball Valves

Sharpe® Series 50

½" - 8"

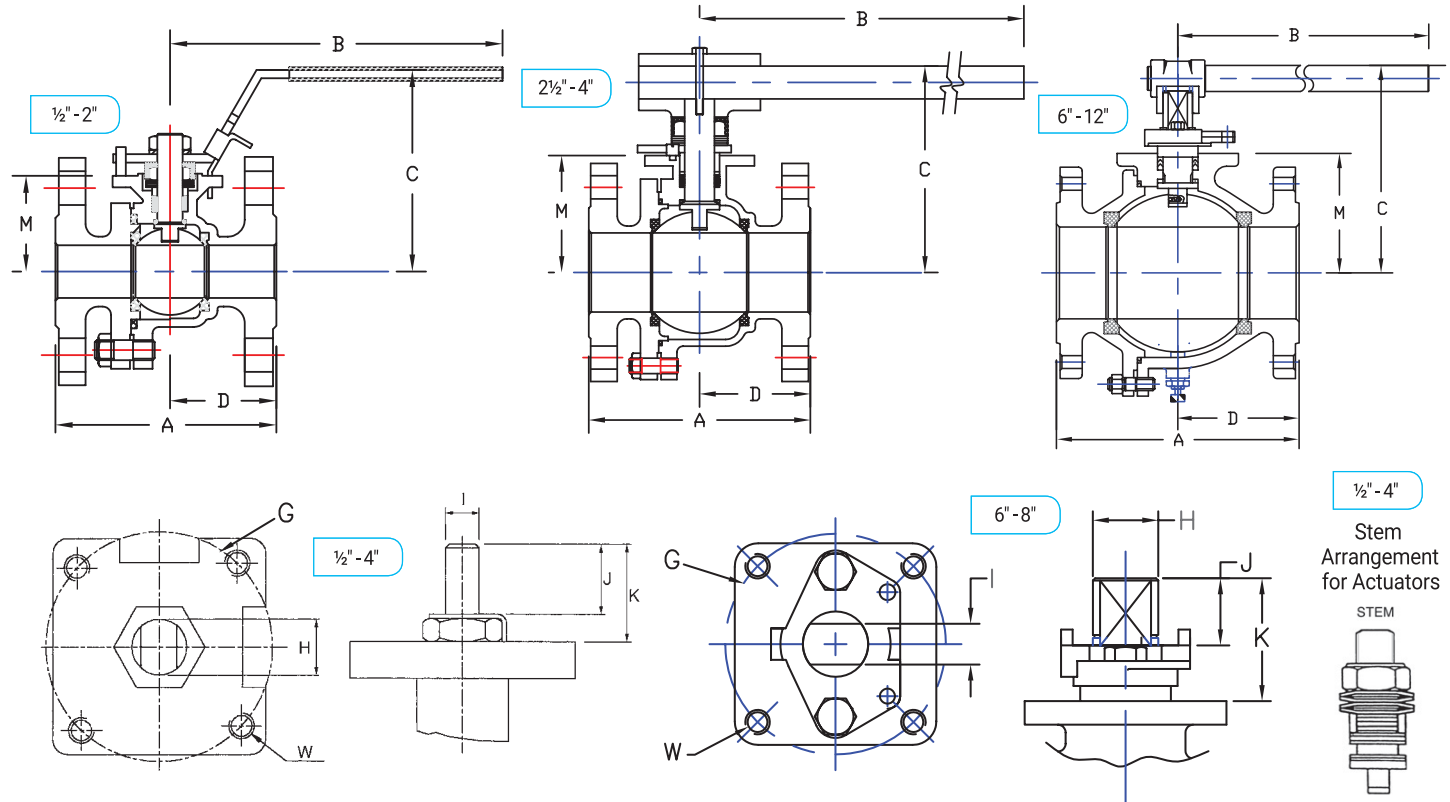

Class 150 Dimensions (Inches)

Size	Port	A	B	C	D	M	G	H	I**	J	K	W
½"	0.59	4.25	4.78	3.58	1.97	1.36	F03	⅜-24 UNF	0.220	0.39	0.73	M5 X 0.8P
¾"	0.79	4.62	4.78	3.72	2.24	1.50	F03	⅜-24 UNF	0.220	0.34	0.70	M5 X 0.8P
1"	0.98	5.00	6.25	3.80	2.20	0.77	F04	7/16-20 UNF	0.291	0.60	0.85	M5 X 0.8P
1 ½"	1.50	6.50	9.03	4.45	3.01	2.24	F05	9/16-18 UNF	0.340	0.68	1.17	M6 X 1.0P
2"	2.00	7.00	9.03	4.82	3.47	2.61	F05	9/16-18 UNF	0.340	0.61	1.15	M6 X 1.0P
2 ½"	2.56	7.50	13.75	6.70	3.54	3.76	F10	1-14 UNF	0.748	0.61	1.87	M10 X 1.5P
3"	3.00	8.00	13.75	7.07	3.64	4.15	F10	1-14 UNF	0.748	0.61	1.87	M10 X 1.5P
4"	3.94	9.00	13.75	7.70	4.42	4.74	F10	1-14 UNF	0.748	0.65	1.91	M10 X 1.5P
6"	6.00	15.50	37.40	11.22	7.64	7.17	F14	1.72	1.018*	1.65	3.58	M12 X 1.75
8"	7.88	18.00	37.40	11.57	8.66	7.72	F12	1.72	1.018*	1.65	3.58	M12 X 1.75

Note:


The dimensions above are for informational purposes only. Please contact Sharpe Valves if you need dimensions for construction

** +0.000/ -0.002 * +.000 / -.003

ASME Class 150, Flanged,
Full Port, Ball Valves
Sharpe® Series 50



Valve Pressure – Temperature Rating

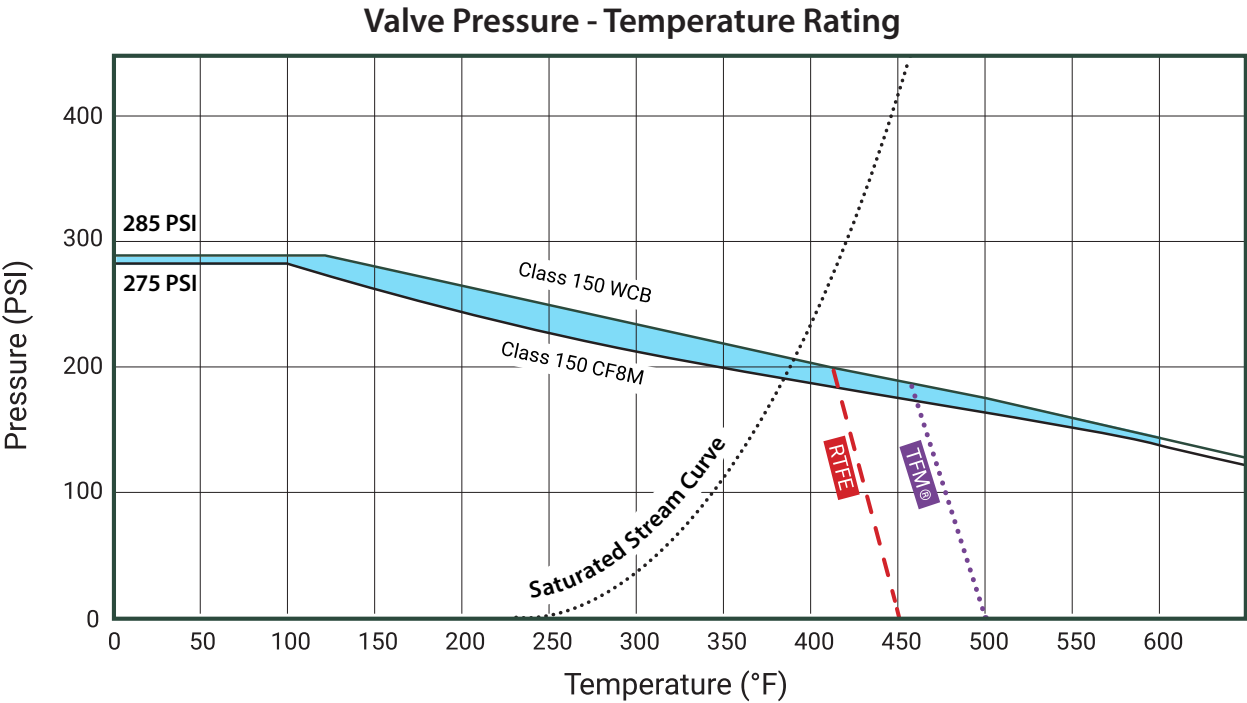


Note:
In the chart, the pressure–temperature capability of a specific valve is the region BELOW the body material line, and LEFT of the seat material line.
The valve body ratings are based on ASME B16.34 rating for materials.
The graphs are based on laboratory testing and our experience in field.
The seat ratings depend on the material, design, application and function.

Sharpe Seat Materials

TFM	M - TFM® PTFE Dyneon® TFM PTFE is a second generation PTFE with improved chemical and heat resistant properties and stress recovery. Its temperature range is -100°F to 500°F (-73°C to 260°C) Color - white.
	R - Reinforced Polytetrafluoroethylene (RTFE). PTFE's mechanical properties are enhanced by adding 15% filler material to provide improved strength, stability and wear resistance. Its temperature range is from -320°F to 450°F (-196°C to 232°C). Color-off-white.

ASME Class 150, Flanged,
Full Port, Ball Valves
Sharpe® Series 50

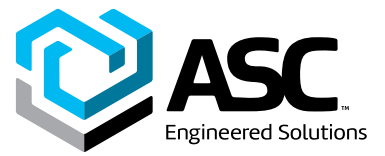

Technical Information

Size	Cv	Weight (lbs.)
1/2	26	4
3/4	50	6
1	94	8
1-1/2	260	15
2	480	20
2-1/2	750	36
3	1150	45
4	2110	75
6	5070	168
8	9330	292

Applicable Standards

Wall Thickness	ASME B16.34
Face to Face Dimensions	ASME B16.10
Flange Dimensions	ASME B16.5
NACE	MR-0175
Pressure Test	ASME B16.34, API 598 (optional)
Basic Design	ASME B16.34

ASME Class 150, Flanged,
Full Port, Ball Valves
Sharpe® Series 50



How to order
Sharpe® Series 50

Example: ¾ 50-11-4R

¾" Series 50 Full Port, Split Body Flanged, Raised Face, Class 150 Ball Valve, Cast Carbon Steel Body with 316 Stainless Ball and Stem, RTFE Seats, PTFE Body Seal and RTFE Stem Packing.

¾"	50	-	11	-	4	-	R	-	
Size	Series		Class		Body Material		Seat Material		Suffixes & Options
½	50		11 150		Carbon Steel (cast WCB)		M TFM™		OH Oval Handle, Non-locking up to 2"
¾					4		R RTFE		L Lockable Stem Extension, 316SS
1					6				
1-½					Stainless Steel (cast CF8M)				
2									
2-½									
3									
4									
6									
8									

Note:
Responsibility for proper selection, use and maintenance of any product remains solely with the purchaser and end user. We reserve the right to modify or improve the designs or specifications of any product at any time without notice.

About ASC Engineered Solutions

ASC Engineered Solutions is defined by quality—in its products, services and support. With nearly 2,000 employees, the company's portfolio of precision-engineered piping support, valves and connections provides products to more than 4,000 customers across industries, such as mechanical, industrial, fire protection, oil and gas, and commercial and residential construction. Its portfolio of leading brands includes ABZ Valve®, AFCON®, Anvil®, Anvil EPS, Anvil Services, Basic-PSA, Beck®, Catawissa, Cooplet®, FlexHead®, FPPI®, Gruvlok®, J.B. Smith, Merit®, North Alabama Pipe, Quadrant®, SCI®, Sharpe®, SlideLOK®, SPF®, SprinkFLEX®, Trenton Pipe and VEP. With headquarters in Oak Brook, IL, ASC also has ISO 9001:2015 certified production facilities in PA, TN, IL, TX, AL, LA, KS, and RI.



asc-es.com

Building connections that last™

