


WARDFlex® Tubing & Components Stripwound Conduit

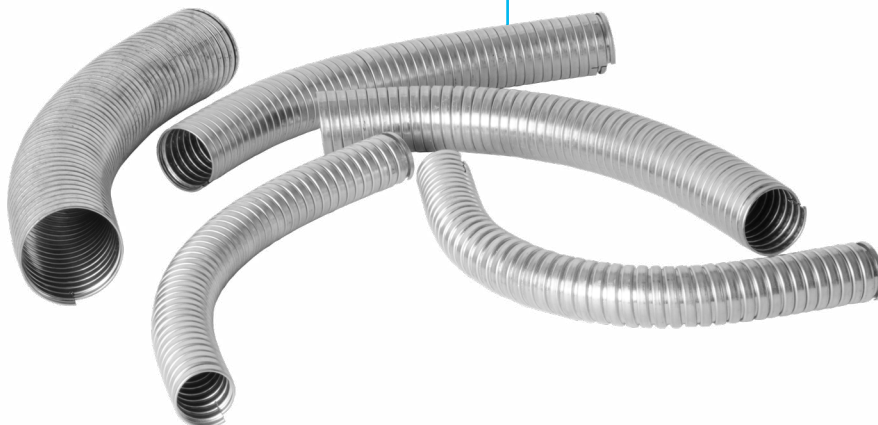

Features

- Easy Installation
- Available for tubing sizes $\frac{3}{8}$ " through $1\frac{1}{4}$ "
- Available in 1 ft lengths or 50 ft coils

Listings

- CSA: File # 112940_0_000

Technical Data

Materials

Conduit
Galvanized Steel

Stripwound metal conduit can be used to protect WARDFlex®/WARDFlex® MAX CSST when the tubing is in a concealed location and cannot be displaced a minimum of 3" from a puncture threat or the distance between supports is less than 24 inches. Stripwound conduit cannot be used as a substitute for striker plates where tubing passes through structural members.

Dimensions

Price Sheet Item #	For CSST Size	Normal Size	Strip Thickness	Length	Approximate Weight (lbs)
620	$\frac{3}{8}$ "	$\frac{3}{4}$ "	0.01"	50'	9.00
621	$\frac{3}{8}$ "	$\frac{3}{4}$ "	0.01"	1'	0.29
622	$\frac{1}{2}$ "	1"	0.01"	50'	20.00
623	$\frac{1}{2}$ "	1"	0.01"	1'	0.40
624	$\frac{3}{4}$ "	$1\frac{1}{4}$ "	0.01"	50'	24.00
625	$\frac{3}{4}$ "	$1\frac{1}{4}$ "	0.01"	1'	0.49
626	1"	$1\frac{1}{2}$ "	0.01"	50'	28.00
627	1"	$1\frac{1}{2}$ "	0.01"	1'	0.64
628	$1\frac{1}{4}$ "	2"	0.01"	50'	35.00
629	$1\frac{1}{4}$ "	2"	0.01"	1'	0.68



PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	