


## WARDFlex® Tubing & Components Couplings

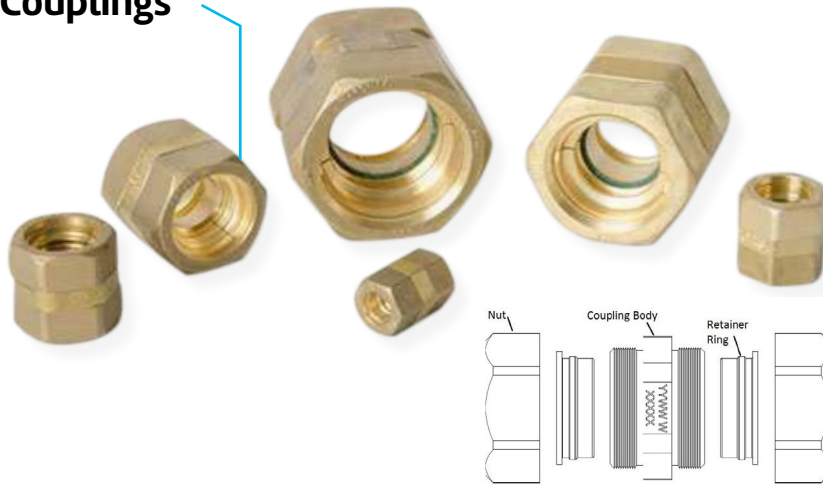

The 3/8" through 1 1/4" WARDFlex® tubing is terminated using the patented, STEPSAVER double seal fitting. The 1 1/2" and 2" tubing utilize the WARDFlex® traditional gasketed fitting design. Only fittings designed and listed for use with the WARDFlex® and WARDFlex® MAX CSST Piping Systems shall be used when connecting to the flexible piping.

### Features

- Approved for concealed use
- One corrugation crush seal
- Reusable
- 3/8" through 1 1/4" patented STEPSAVER fittings
  - Primary metal to metal seal
  - Secondary gasket seal
- 1 1/2" and 2" fittings
  - Reliable gasket seal

### Components

- Coupling Body
- Retainer Ring (2)
- Nut (2)
- Gasket (2)

### Listings

- CSA: File # 112940\_0\_000
- IAPMO: File # 3353
- ICC: Report # ESR-1879

### Technical Data

#### General

**Certified Operating Pressure**  
25 psi

#### Materials

**Body, Retainer Ring, & Nut**  
Brass

**Gasket**  
Composite Fiber



### Dimensions

Price Sheet Item #	CSST Size	Assembled Length	Nut Hex	Coupling Hex	Maximum Tightening Torque (ft/lbs)	Approximate Weight (lbs)
260	3/8"	1.568"	1 1/16"	1 1/16"	50	0.33
261	1/2"	1.504"	1 3/16"	1 1/16"	50	0.34
262	3/4"	1.656"	1 1/2"	1 1/2"	120	0.57
263	1"	1.804"	1 3/4"	1 3/4"	160	0.83
264	1 1/4"	2.220"	2 1/4"	2 1/4"	200	1.67
265	1 1/2"	2.964"	3"	3"	200	3.99
266	2"	3.390"	3 1/2"	3 1/2"	200	5.47

PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	